

FEATURES

- Stainless Steel Construction
- High flow rate, minimal restriction
- No maintenance, no external power, no filters required.
- Independent testing confirms ScaleRX reduces scale accumulation by 76%
- Suitable for both indoor and outdoor applications.
- Connects to cold water supply

CERTIFICATIONS


- IAPMO R&T
 - NSF/ANSI 61
 - NSF/ANSI 372

MATERIAL SPECIFICATIONS

	PART	MATERIAL
1	Housing (Body)	Stainless Steel
2	Core Tube	POM (Engineered plastic)
3	Turbine Disc A	Proprietary Alloy A
4	Turbine Disc B	Proprietary Alloy B
5	Recession Cap	Stainless Steel

FLOW RATE & PRESSURE DROP

- Min/Max Pressure (inlet) 4 psi/145 psi
- Recommended Temperature (inlet): 40°F to 100° F.
- Maximum flow rate (GPM): 14.1 (3/4") 17.6 (1")

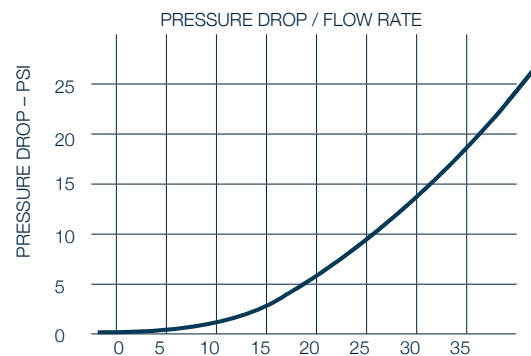

SPECIFICATIONS

Water heater inlets shall be equipped with ScaleRX™ devices to condition water and prevent Calcite scale accumulation on water heater components. No additional bypass piping or shut-off valves are required. ScaleRX should be installed in accordance with instructions included with the device.

PROJECT:

SUBMITTED BY:



4321 PIEDMONT PARKWAY,
GREENSBORO, NC 27410
PHONE: 800-645-0101
EMAIL: SALES@AMERICANVALVE.COM
WWW.AMERICANVALVE.COM